



**United States Steel**

## **Technical Bulletin Construction:**

### **GALVALUME® Sheet Steel**

**For further assistance on the use of steel building panels or related topics, contact U. S. Steel Construction Sales**

**Group: U. S. Steel Construction Sales**

**600 Grant Street Room 1714 Pittsburgh, PA 15219**

**1-877-798-7909**

**[constructionsales@uss.com](mailto:constructionsales@uss.com)**

# GALVALUME® Sheet Steel

The material in this paper is intended for general information only. Any use of this material in relation to any specific application should be based on independent examination and verification of its unrestricted availability for such use, and a determination of suitability for the application by professionally qualified personnel. No license under any United States Steel Corporation patents or other proprietary interest is implied by the publication of this paper. Those making use of or relying upon the material assume all risks and liability arising from such use or reliance.



For further assistance on the use of steel building panels or related topics, contact U. S. Steel Construction Sales Group:

U. S. Steel Construction Sales  
600 Grant Street  
Room 1714  
Pittsburgh, PA 15219  
1-877-798-7909  
constuctionsales@uss.com

## Product Description

GALVALUME® is the trade name for a sheet steel product having a highly corrosion resistant coating of a nominally 55% aluminum, 43% zinc alloy. The coating is applied using a continuous hot-dip coating process. The metallic coating on GALVALUME® Sheet Steel combines the galvanic corrosion protection of zinc with the passivating barrier protection of aluminum into an economical long-lasting sheet steel product.

GALVALUME® Sheet Steel is intended for uses where excellent corrosion resistance is required. Typical applications are roofs, siding, air-conditioning equipment, appliances, and automotive under-body parts or high temperature applications. The metallic coating provides galvanic protection to the steel and has excellent barrier protection.

In certain environments, U. S. Steel recommends either not using GALVALUME® Sheet Steel or taking precautions to limit the corrosion. These environments include:

- Contact with lead, graphite, cement or copper. This includes but is not limited to treated lumber containing copper and other corrosive elements.
- Use in harshly corrosive environments, including proximity to seawater, exposure to very long wet times, chronic corrosive chemical exposure and animal confinement applications.



United States Steel



# GALVALUME® Sheet Steel

The material in this paper is intended for general information only. Any use of this material in relation to any specific application should be based on independent examination and verification of its unrestricted availability for such use, and a determination of suitability for the application by professionally qualified personnel. No license under any United States Steel Corporation patents or other proprietary interest is implied by the publication of this paper. Those making use of or relying upon the material assume all risks and liability arising from such use or reliance.

## Material Description

Common ASTM designations for the construction industry are Commercial Steel (CS) types A and B, Forming Steel (FS), and Structural Steel (SS) Grades 33,37, 40, 50, and 80. U.S. Steel also offers customized grades upon request, contact the U. S. Steel Construction Sales Group. GALVALUME® Sheet Steel may be temper passed and/or tension leveled to improve sheet shape and surface finish.

GALVALUME® coatings are approximately 43% zinc, 55% aluminum, with the balance containing primarily silicon and iron for good coating adhesion. U. S. Steel uses low silicon for improved coating ductility (see U. S. Steel Technical Bulletin on "Tension-Bend Staining of Prepainted GALVALUME® Sheet" for more information). U. S. Steel recommends chemical treatment for bare and painted applications. GALVALUME® Sheet Steel is produced to customer specifications, often in conformance with ASTM A792. Table 1 lists ASTM coating weights.

Table 1. ASTM GALVALUME Coating Weights

Coating Weight	Triple-Spot Total both Sides (oz/ft2)	Single-Spot Total Both Sides (oz/ft2)	Triple-Spot Minimum Per Side (oz/ft2)
AZ 50	0.50	0.43	Not Specified
AZ 55	0.55	0.5	Not Specified
AZ 60	0.6	0.52	Not Specified

## Corrosion Protection

Bare GALVALUME® Sheet Steel has exceptional corrosion protection. Samples from the initial GALVALUME® Sheet production are still in outdoor exposure testing and are performing very well. Figure 1 shows recent results. Inspections of 25-year-old bare GALVALUME® roofs support these tests. For most environments, the full lifetime of the product has not yet been determined.

With GALVALUME® Sheet Steel's excellent bare corrosion resistance, it is typically only painted for aesthetic reasons in high slope roofing applications. U. S. Steel qualifies paints that provide the best corrosion protection. Using these paints with qualified coil coaters ensures the best corrosion performance.

For further assistance on the use of steel building panels or related topics, contact U. S. Steel Construction Sales Group:

U. S. Steel Construction Sales  
600 Grant Street  
Room 1714  
Pittsburgh, PA 15219  
1-877-798-7909  
constuctionsales@uss.com

# GALVALUME® Sheet Steel

The material in this paper is intended for general information only. Any use of this material in relation to any specific application should be based on independent examination and verification of its unrestricted availability for such use, and a determination of suitability for the application by professionally qualified personnel. No license under any United States Steel Corporation patents or other proprietary interest is implied by the publication of this paper. Those making use of or relying upon the material assume all risks and liability arising from such use or reliance.

Each prepainted coil must pass on-line quality control tests of paint thickness, curing, adhesion, color, and gloss. In addition, U. S. Steel routinely audits the quality of prepainted GALVALUME® products.

**Figure 1. Outdoor exposure results for bare GALVALUME® Sheet Steel.**


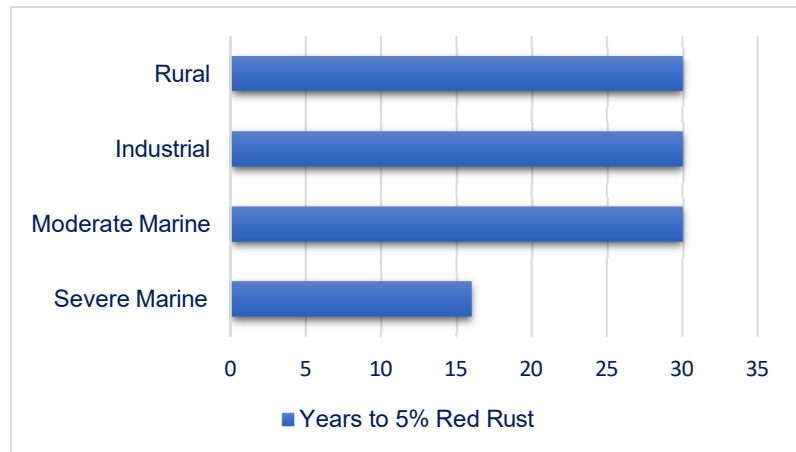


Figure 2 shows the average edge corrosion as measured on painted GALVALUME® Sheet Steel at acid rain, non-marine, subtropical and industrial sites. The edge creep is slight and stops increasing after 2 years.

**Figure 2. Outdoor exposure results for prepainted GALVALUME® Sheet Steel.**

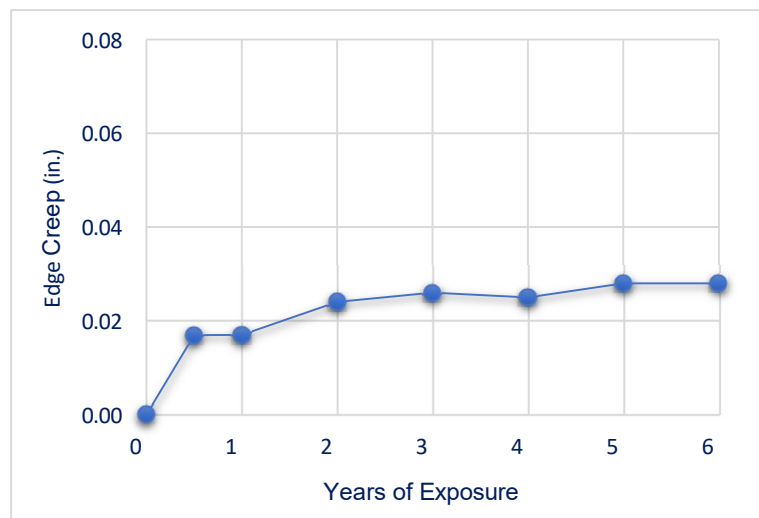

For further assistance on the use of steel building panels or related topics, contact U. S. Steel Construction Sales Group:

U. S. Steel Construction Sales  
600 Grant Street  
Room 1714  
Pittsburgh, PA 15219  
1-877-798-7909  
[constuctionsales@uss.com](mailto:constuctionsales@uss.com)

# GALVALUME® Sheet Steel

The material in this paper is intended for general information only. Any use of this material in relation to any specific application should be based on independent examination and verification of its unrestricted availability for such use, and a determination of suitability for the application by professionally qualified personnel. No license under any United States Steel Corporation patents or other proprietary interest is implied by the publication of this paper. Those making use of or relying upon the material assume all risks and liability arising from such use or reliance.



For further assistance on the use of steel building panels or related topics, contact U. S. Steel Construction Sales Group:

U. S. Steel Construction Sales  
600 Grant Street  
Room 1714  
Pittsburgh, PA 15219  
1-877-798-7909  
constuctionsales@uss.com



## Other Hot Dip Galvanized Properties and Services

### Technical Support

U. S. Steel has technical service and regional sales representatives located throughout the country. For technical support and literature contact your technical service or sales representative.

### Quality Control

U. S. Steel GALVALUME® Sheet Steel is tested for coating adhesion, surface appearance, hardness, tensile and coating weight before shipping, ensuring customers only the highest quality product.

### Handling

Exposure to moisture while in coil form or in a tight stack of formed panels can cause storage stain on GALVALUME® Sheet Steel. To help prevent the stain, U. S. Steel applies a chemical treatment to all GALVALUME® Sheet Steel, unless requested otherwise.

### Formability

GALVALUME® Sheet Steel is easily roll-formed or stamped. Vanishing oil can be mill applied as a lubricant to assist in roll forming the unpainted product. Also available for enhanced formability and corrosion resistance is a mill-applied acrylic coating on the surfaces of GALVALUME® Sheet Steel, referred to as ACRYLUME® Sheet Steel (see U. S. Steel Technical Bulletin on ACRYLUME® Sheet Steel for more information). Prepainted GALVALUME® Sheet Steel can be roll formed without the need for additional lubricants. Formability help is available through the U. S. Steel Construction Group.

### Installation

GALVALUME® Sheet Steel is readily installed in the same manner as HDG. Fasteners should be chosen that have a life expectancy equivalent to GALVALUME® Sheet Steel. Sealants should be neutral cure only.

### High Temperature Properties

GALVALUME® Sheet Steel has excellent heat reflection properties, like aluminum and is more resistant to higher temperature than HDG. It will maintain its bright surface appearance and reflectivity in prolonged exposure at 600°F and is not heavily oxidized by temperatures up to 1200°F.

### Warranty

U. S. Steel warrants GALVALUME® sheet steel against perforation. Please refer to the GALVALUME® Limited Warranty Technical Bulletin for specific warranty periods. This warranty applies to unpainted product and painted material only when an approved paint is applied by a qualified coil coater. It only applies for normal exposure conditions. In highly corrosive environments or situations where design issues control the product life, the warranty may not be in effect.